

## Compact Standalone NVR Series



Model: NT1552



Model: NT4253

Flexible, Seamless Live & Playback on multi channel view  
Internal DHCP Server  
Compact Size with 2 HDDs

Capacity

Max.  
80/160/320Mbps  
Up to 8/16/32ch



Support UPnP



Compatibility with  
IP Cameras




Support  
Local Alarm and Audio

## SPECIFICATION

MODEL	NT1551	NT1552	NT4253
Operating System	Embedded Linux		
OS Firmware	Linux OS in Flash Memory		
Memory	2GB DDR3 Memory		4GB DDR3 Memory
Video Input	8 (IP)	16 (IP)	32 (IP)
Video Output (Spot)	Composite : 1 (Video Output)		Composite: 1 (Selectable)
VGA (Spot)	1 (Max. 1920 x 1080) (VGA)		1 (Max. 1920 x 1080) (Selectable)
HD Out	1 (Max. 1920 x 1080)		1 (Max. 3840 x 2160)
Spot Output	Composite : 1		-
Throughput	80Mbps	160Mbps	320Mbps
Audio Input / Output	3 Input / 1 Output		
Alarm Input	2 Input		
Alarm Output	1Relay		
USB	2 x USB (1 x Front Panel, 1 x Rear Panel)		
Ethernet	10 / 100 / 1000 Mbps Ethernet (RJ-45) x 2		
User Interface (GUI / Control Device)	Keypad, Mouse, PTZ Control		
Archive File Format	EXE (Video Clip) / AVI (Video Clip) / JPEG (Still Image)		
NTP	Yes		
GMT Time Zone	Yes		
Auto DST	Yes		
Recording Modes	Continuous / Alarm / Motion / Emergency		
Playback Control	x1, x2, x4, x8, x16, x32, x64		
PTZ Control	Onvif		
Text Insertion (POS)	4		
Multi Language	English / Korean / Japanese / Czech / Dutch / Finnish / French / German / Italian / Polish / Portuguese / Russian / Spanish / Thai / Turkish / Vietnamese		
Central Monitoring Station	CMS Pro (Windows) / iCMS (Mac) / Web Client Pro		
Mobile Viewer	iOS / Android		
Primary Storage	2 x SATA HDD		
Clip Copy Storage	USB Memory Stick		
Dimension (WxDxH)	290 mm x 274 mm x 65 mm / 11.41 inch x 10.78 inch x 2.55 inch		
Operating Temperature	5°C~40°C / 41°F~104°F		
Operating Humidity	0% ~ 90%		
Power Adapter	12V, 3A (36W)		

\* Design and specifications are subject to change without notice.

## DIMENSION

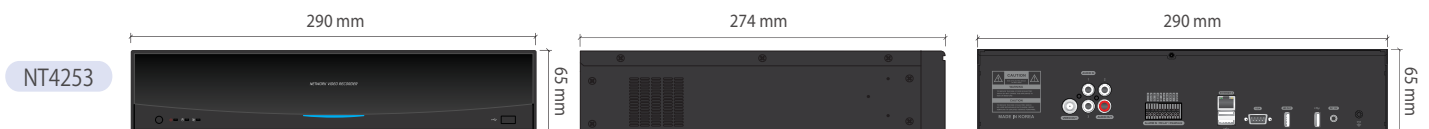

## SYSTEM INTERCONNECTION

