

Rack-Mountable Standalone NVR Series



Model: NX3452



Model: NX6253

Flexible, Seamless Live & Playback on multi channel view

Internal DHCP Server

HD Spot out through VGA (NX6253)

Capacity

Max.
80/160/320Mbps
Up to 8/16/32ch

UPnP™

Support UPnP

ONVIF

Compatibility with
IP Cameras

4K
ULTRA HD


Support 4K Display
(NX6253)

SPECIFICATION

MODEL	NX3451	NX3452	NX6253
Operating System	Embedded Linux		
OS Firmware	Linux OS in Flash Memory		
Memory	2GB DDR3 Memory		4GB DDR3 Memory
Video Input	8 (IP)	16 (IP)	32 (IP)
Video Output (Spot)	Composite : 1 (Video Output)		Composite: 1 (Selectable)
VGA (Spot)	1 (Max. 1920 x 1080) (VGA)		1 (Max. 1920 x 1080) (Selectable)
HD Out	1 (Max. 1920 x 1080)		1 (Max. 3840 x 2160)
Spot Output	Composite : 1		-
Throughput	80Mbps	160Mbps	320Mbps
Audio Input / Output	4 Input / 1 Output		
Alarm Input	4 Input		
Master Alarm	1		
Alarm Output	4 (TTL) / 2 (Relay)		
USB	4 x USB (2 x Front Panel, 2 x Rear Panel)		3 x USB (2 x Front Panel, 1 x Rear Panel)
Ethernet	10 / 100 / 1000 Mbps Ethernet (RJ-45) x 2		
User Interface (GUI / Control Device)	Keypad, Mouse, PTZ Control		
Archive File Format	EXE (Video Clip) / AVI (Video Clip) / JPEG (Still Image)		
NTP	Yes		
GMT Time Zone	Yes		
Auto DST	Yes		
Recording Modes	Continuous / Alarm / Motion / Emergency		
Playback Control	x1, x2, x4, x8, x16, x32, x64		
PTZ Control	Onvif		
Text Insertion (POS)	4		
Multi Language	English / Korean / Japanese / Czech / Dutch / Finnish / French / German / Italian / Polish / Portuguese / Russian / Spanish / Thai / Turkish / Vietnamese		
Central Monitoring Station	CMS Pro (Windows) / iCMS (Mac) / Web Client Pro		
Mobile Viewer	iOS / Android		
Primary Storage	4 x SATA HDD		4 or 6 x SATA HDD (Optional)
eSATA	1 Port		
Clip Copy Storage	USB Memory Stick		
Dimension (WxDxH)	430 mm x 380 mm x 88 mm / 16.93 inch x 14.96 inch x 3.46 inch		430 mm x 430 mm x 88 mm / 16.93 inch x 16.93 inch x 3.46 inch
Operating Temperature	5°C~40°C / 41°F~104°F		
Operating Humidity	0% ~ 90%		
Power Adapter	12V, 6A (72W)		

* Design and specifications are subject to change without notice.

DIMENSION

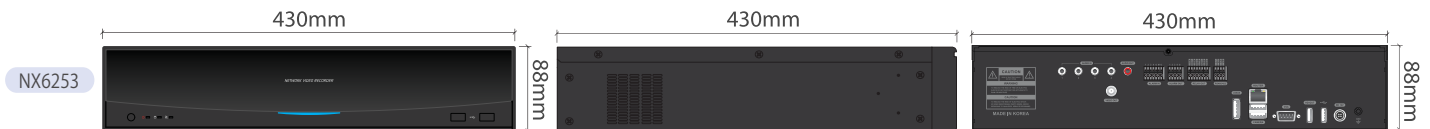

SYSTEM INTERCONNECTION

